


12" x 12" XIRÓS II

Logos Imaging's XIRÓS II, the mid-sized DR Imaging System, is currently our most popular product.

- Glass-free
- On-board calibration
- Zero RF signature on startup with on/off switch for wireless communications
- All batteries used in the system are removable
- Automatic Exposure Detection (AED) with no additional accessories
- Android compatible

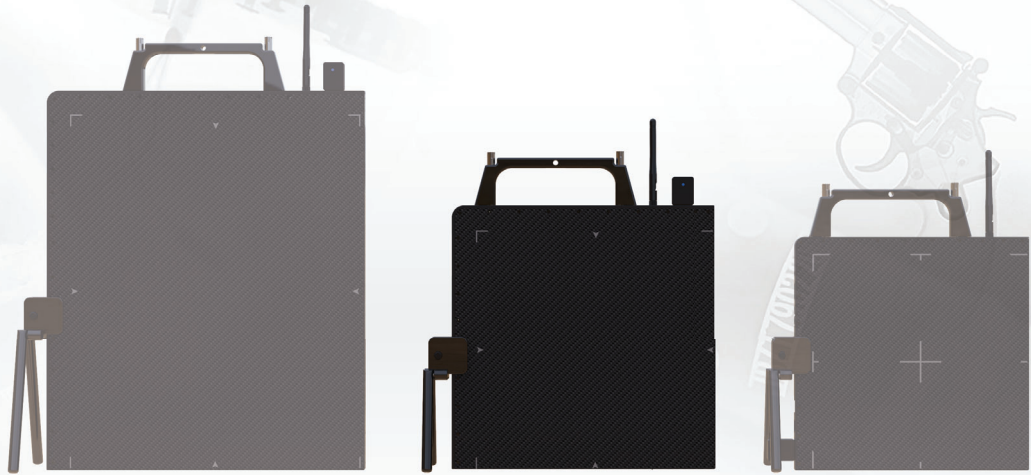

XIRÓS II DR System SPECIFICATIONS

Technology	Amorphous Silicon with TFT
Weight	4.3 lb (1.9 kg) including battery
Battery life	7 hours (2 batteries in a kit)
Dimensions (Panel)	12.6" x 12.6" x 0.6" (320 x 320 x 15 mm)
Pixel Area	11.3" x 11.3" (287 x 287 mm)
Pixel Size	140 µm
Limiting Resolution	3.57 lp/mm
AD Conversion	16 bits
Communications Interface	Wireless IEEE 802.11ac Wired LAN
Communications Range	Wireless 150 m with standard antenna*; Wired 25 m with standard cable reel; Additional network options available

* Line of Sight; higher gain antennas available for longer range.

Features

- IP67 and Glass-Free
- 3 mm bottom and side border with 80% Fill Factor
- 140 µm Pixel Size, 3.57 lp/mm
- Up to 14 hours of operation on a single charge



Contact Logos Imaging

Mailing Address

P.O. Box 576, Windsor, CO 80550

Shipping Address

4523 Endeavor Drive, Unit B, Johnstown, CO 80534

Toll Free +1 (866) 939-4044
Office +1 (765) 939-4044
Fax +1 (765) 939-4040
Email sales@logosimaging.com
Web www.logosimaging.com



LOGOS IMAGING



Sample image taken with XR150 20V (15 pulses) on XIRÓŠ II panel from 1 meter.

Get with our Team to set up a demo date.

